



BFS Series

Multi-Cavity Bag Housings 2 thru 6 round

Shelco's new BFS multi-cavity bag housings are manufactured from 304L or 316L stainless steel with many standard features. The 2BFS clamp style housing is fast becoming a market leader with its quick clamp closer and exceptional value. The heavy duty design of the swing bolt closer and davit assembly make it a perfect choice for your larger flow applications. Protective poly coat over stainless steel is the standard finish.

Standard Features 2BFS Clamp

- Easy open clamp closer
- 150 PSI rated and up to 250°F
- 3" Flanged
- ¼" Gauge ports
- ½" Vent and Drain
- 304L or 316L stainless steel construction
- FDA Buna O-ring
- Stainless steel legs
- · Basket hold down device

Options


- Specialty wire meshed baskets
- 134 coating for sea water and corrosive applications
- Wide variety of connections
- Hydraulic closer available on 5 and 6 round models
- Electro-polishing available
- Heat jacketing


Standard Features 2 thru 6 BFS Swing Bolt


- Heavy duty swing bolt closer with lifting davit
- 150 PSI rated and up to 300°F
- 3" to 6" flanged (see Ordering Guide)
- ¼" Gauge Ports
- ¾" Drain
- ½" Vent
- 304L or 316L stainless steel construction
- FDA Buna O-ring
- Stainless steel legs
- Basket hold down device
- Low profile for easy change out
- · Eye nuts and davit handles are plated to prevent gauling
- Davit arm is painted steel




Hold down device for each basket insuring a positive seal.

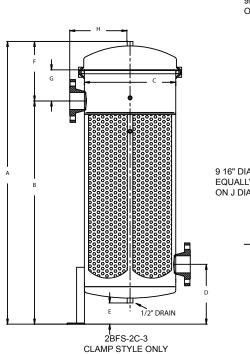





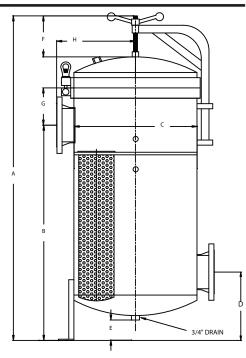

SWING BOLT STYLE ONLY

MODEL	Α	В	С	D	E	F	G	Н		J
2BFS-2C-3	49 9/16"	39 1/8"	16"	10 1/2"	4 1/8"	11 5/8"	13 5/8"	10 9/16"	20 1/2"	20 15/16"
2BFS-2SB	49 9/16"	39 1/8"	16"	10 1/2"	3 11/16"	10"	6 7/8"	10 9/16"	20 1/2"	20 15/16"
3BFS-2SB	52 7/8"	41 1/16"	18"	10 3/4"	3 1/4"	10"	6 1/4"	12 5/16"	22 5/8"	22 15/16"
4BFS-2SB	61 1/4"	40 1/2"	20"	11 1/4"	3 1/4"	10"	8"	12 7/8"	26 1/16"	25"
5BFS-2SB	63 1/2"	42"	24"	13 3/8"	4"	10"	7 1/4"	15 3/8"	30"	29"
6BFS-2SB	63 1/2"	42"	24"	13 3/8"	4"	10"	7 1/4"	15 3/8"	30"	29"

ORDERING GUIDE - Clamp Closer

2	BFS -	- 2	C .	- 3 -	316	E		
# of Bags	Model	Bag Size	Closer	Std. Flanged Connections	Material	Gasket		
2	BFS	2	C = Clamp	3 = 3"	Blank = 304 SS 316 = 316 SS	Blank = Buna E = EPR S = Silicone V = Viton T = Telfon Encapluated Silicone		

ORDERING GUIDE - Swing Bolt Closer

4	BFS -	- 2	SB ·	- 4 -	316	E
# of Bags	Model	Bag Size	Closer	Std. Flanged Connections	Material	Gasket
2	BFS	2	SB = Swing	3 = 3"	Blank = 304 SS	Blank = Buna
3			Bolt	4 = 4"	316 = 316 SS	E = EPR
4				4 = 4"	134 = 3M 134 Coating	S = Silicone
5				4 = 4"	over 304 SS	V = Viton
6				6 = 6"		T = Telfon Encapluated Silicone

Example: 4BFS-2SB-4-316E



tel: 800.543.5843 fax: 860.667.6549 e-mail: info@shelco.com www.shelco.com

SHELCO FILTERS

697 Cedar Street . Newington. CT 06111 . USA



Complete Line of Replacement Filter Bags